



WOODEN PLANKS TILES | 200X1000 MM




www.wolvescreata.com

Natural Wooden Plank Tiles 200x1000mm



Carve A Mark of
Excellence For Your Space

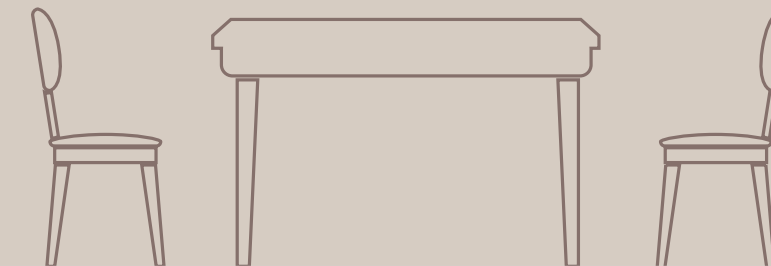

WOODEN
PLANKS TILES
200x1000mm



200x
1000mm | WOODEN
PLANKS TILES



SUITABLE FOR
WALL & FLOOR


BRIGHT FINISHING
TILES

RANDOM
PATTERN

USE GROUTING FOR
BETTER LAYING



Maintaining authenticity is a challenge indeed for many; especially when it involves replicating wooden floor designs. Wooden surfaces come with their own individual characteristics, a product of environmental conditions that induce unique patterns found in tree trunks. The uniqueness of such patterns pose a 'unique' challenge to us, which we have taken with stride. Not only we ensure the quality and aesthetics of designs, but also the resultant feel if one were walking upon a genuine wooden floor. With superb tile printing techniques, we have come up with unique designs, keeping in mind customer preferences and choices, as also to provide a heady mix of different sizes and design ranges to choose from. For those with a distinct taste for wooden flooring, our collections will surely invite a ponderous gaze that doesn't cease to stop.



200x
1000MM | WOODEN
PLANKS TILES



D6 15238



SUITABLE FOR
WALL & FLOOR




BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING

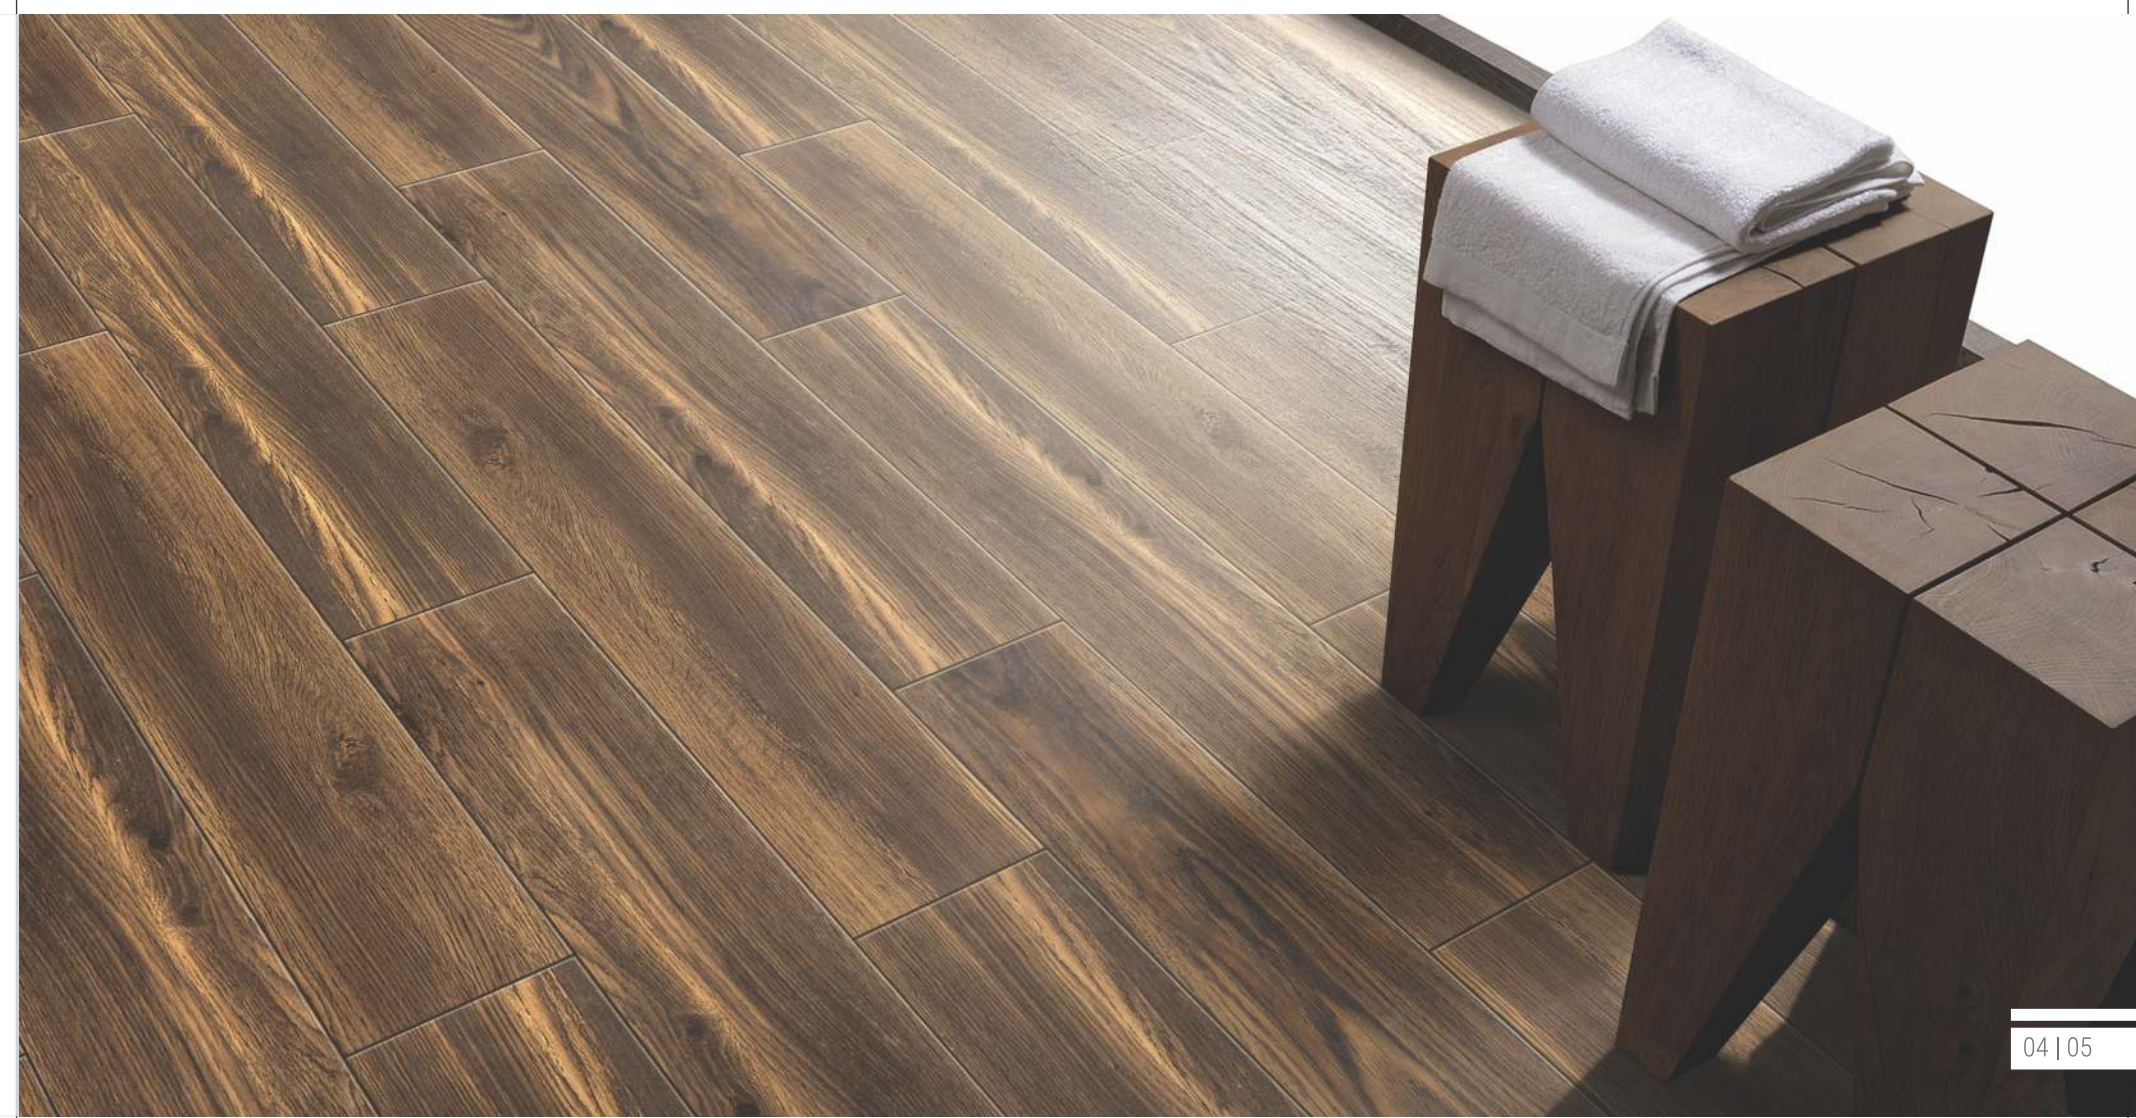



200x
1000MM | **WOODEN**
PLANKS TILES



D6 15240



SUITABLE FOR
WALL & FLOOR

BRIGHT FINISHING
TILES

RANDOM
PATTERN

USE GROUTING FOR
BETTER LAYING





200x
1000MM | WOODEN
PLANKS TILES



D6 15242



SUITABLE FOR
WALL & FLOOR




BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING

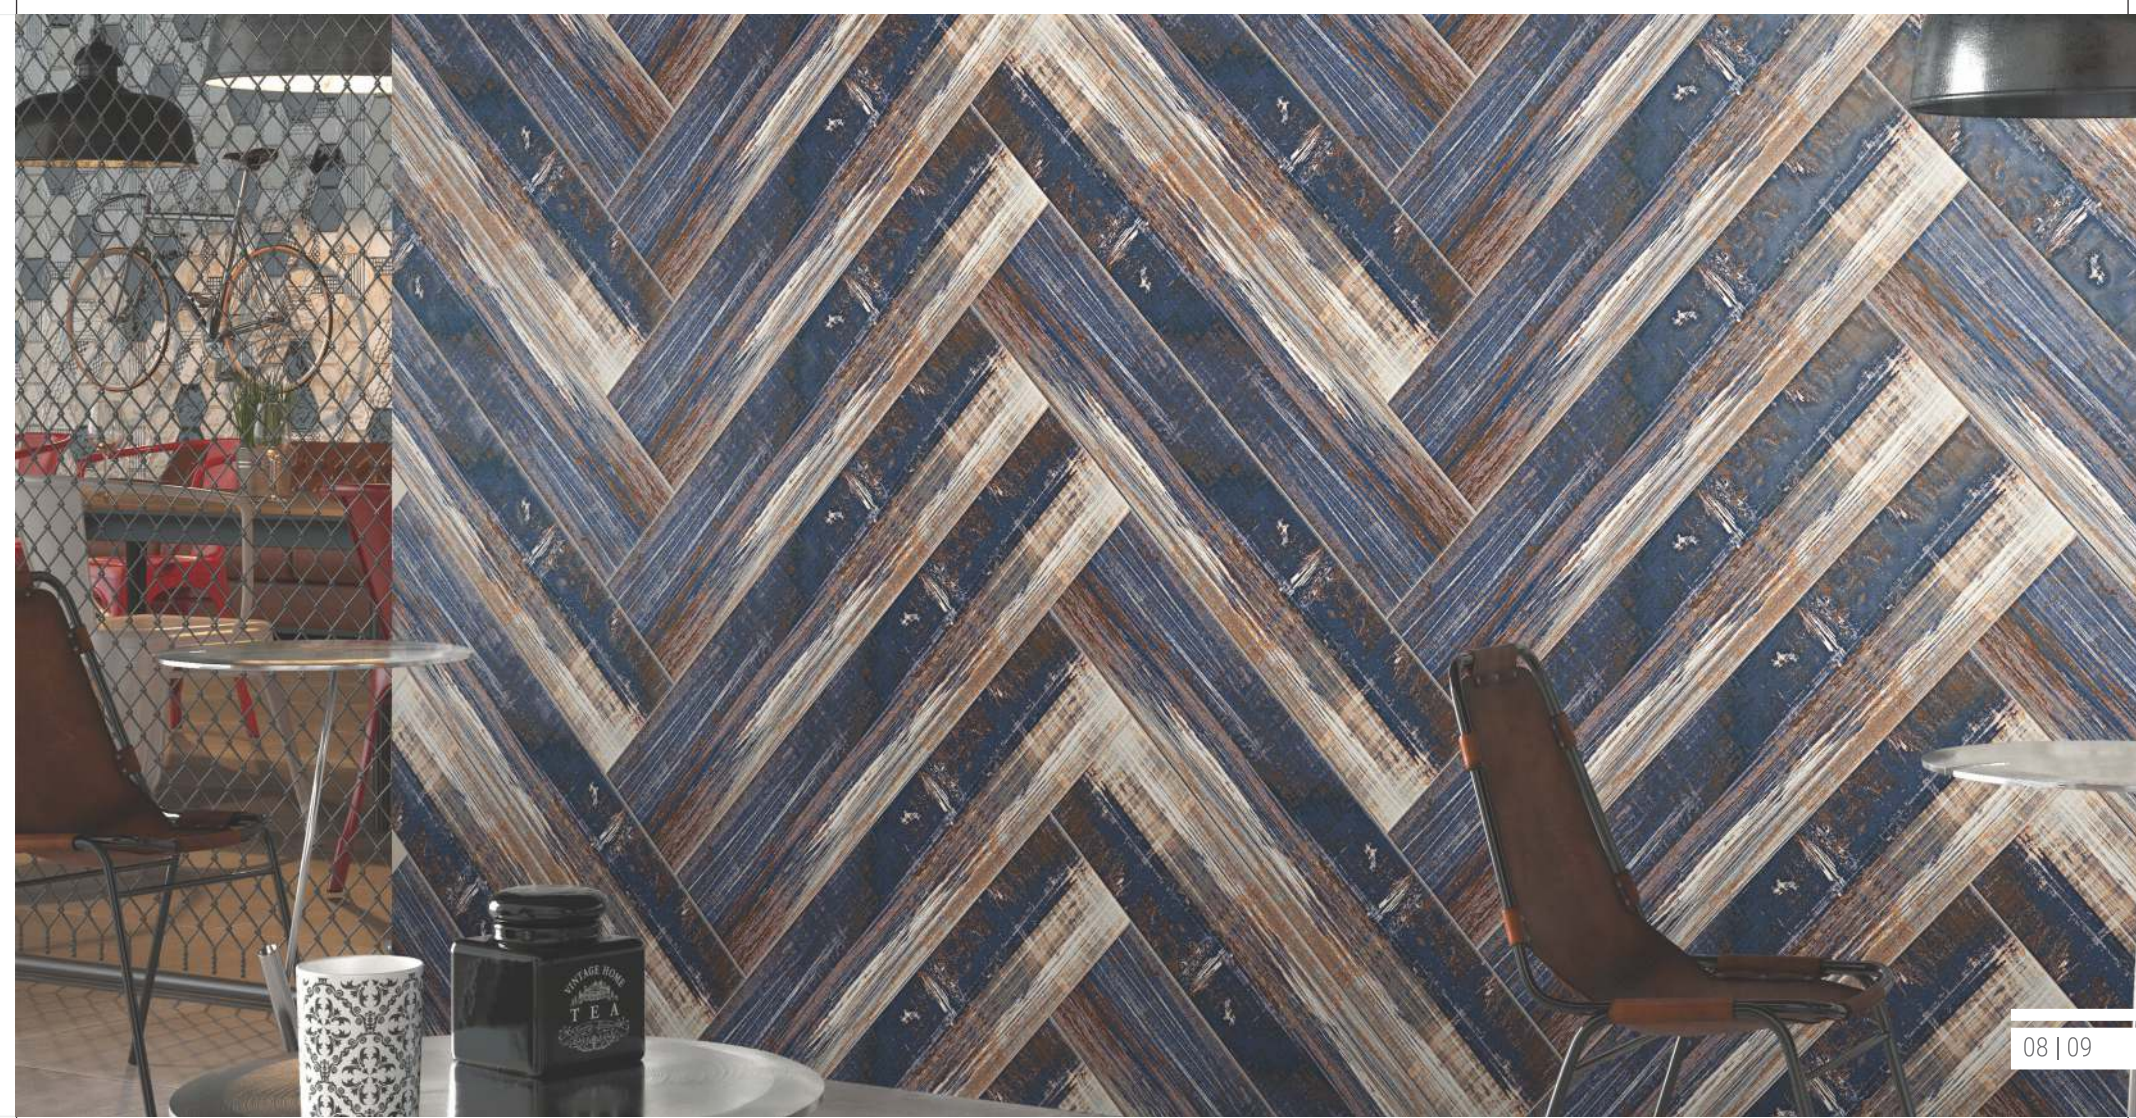



200x
1000MM

WOODEN
PLANKS TILES



D6 15247



SUITABLE FOR
WALL & FLOOR




BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING

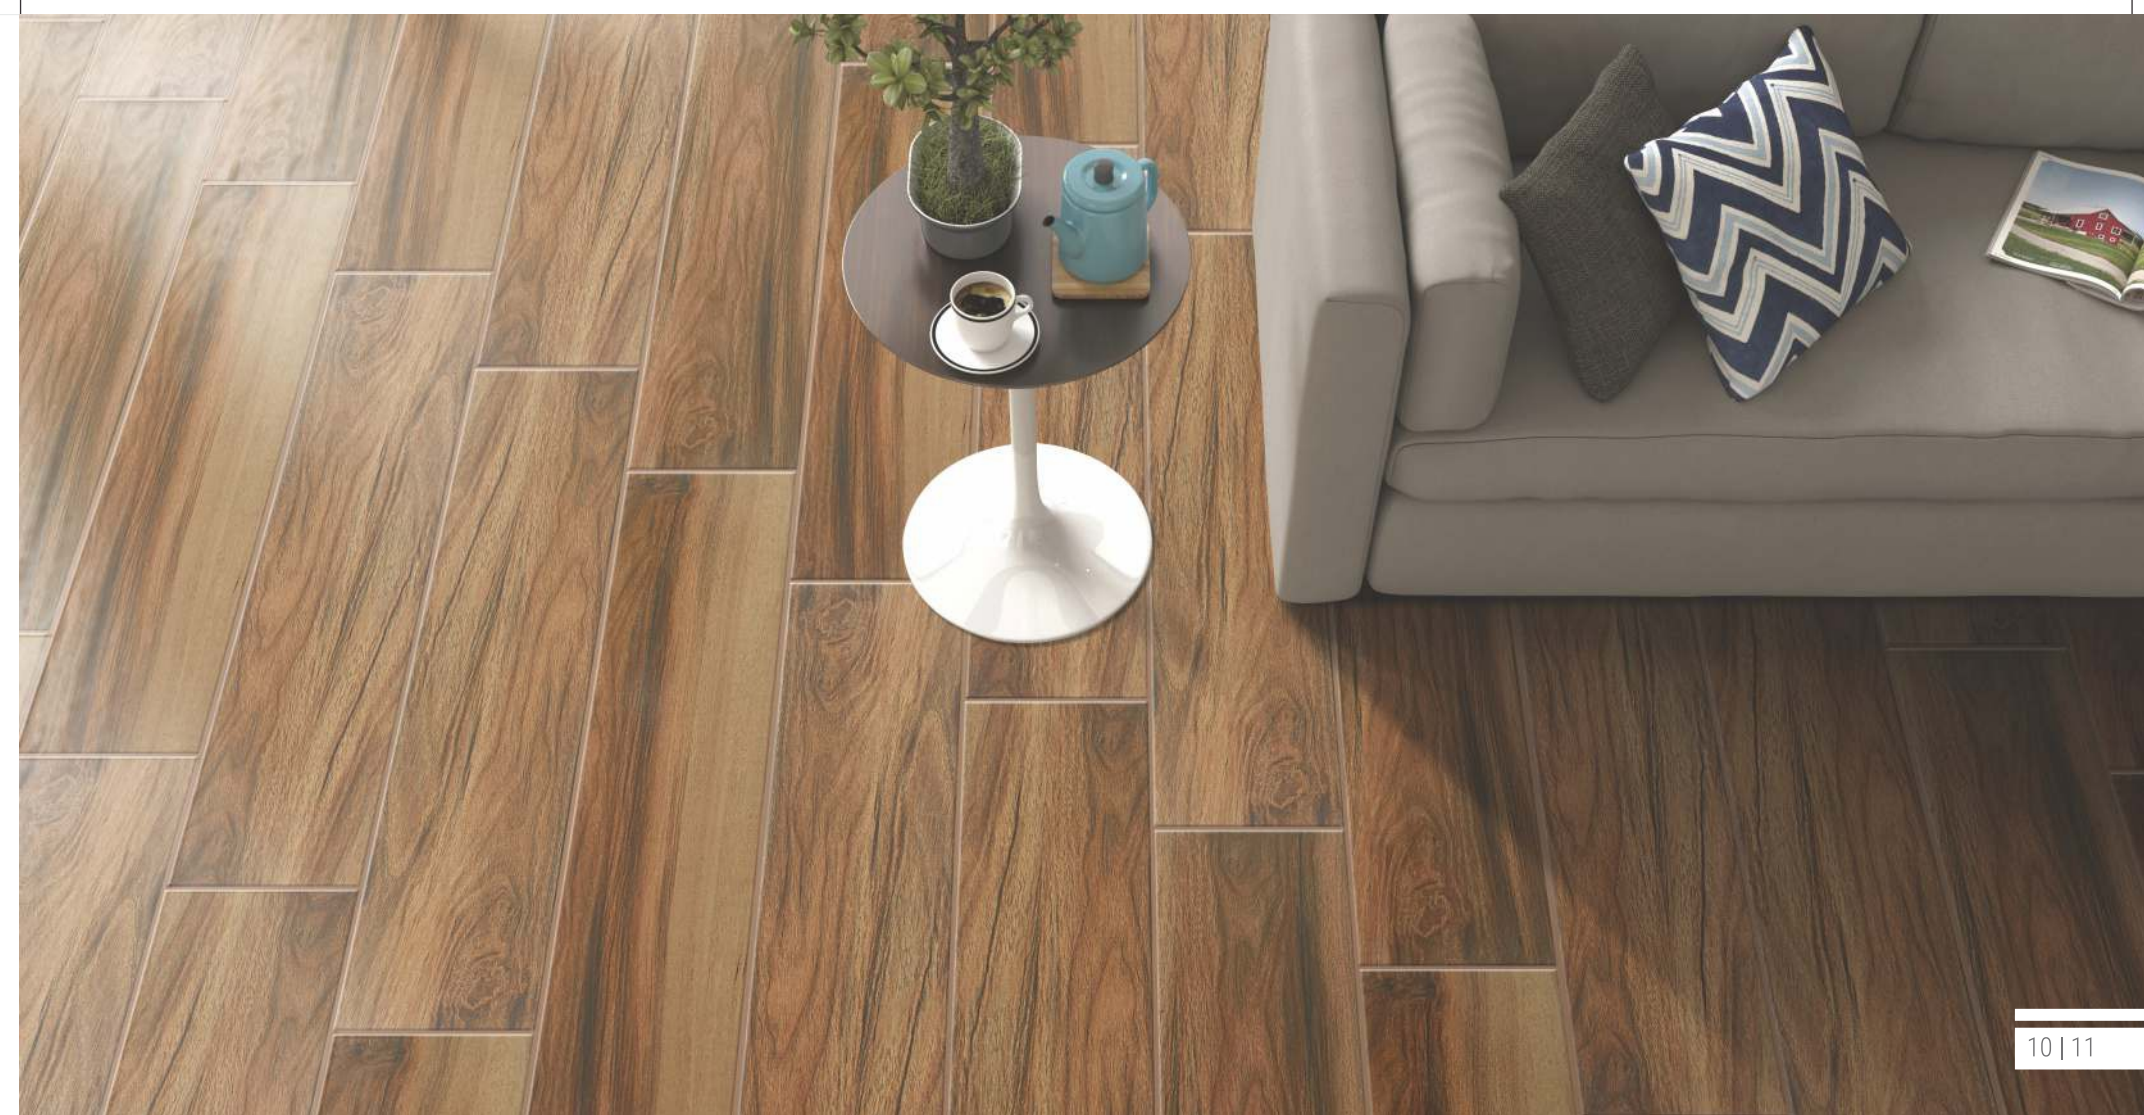



200x
1000MM | WOODEN
PLANKS TILES



D6 15252



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING






200x
1000MM | WOODEN
PLANKS TILES



D6 15256





200x
1000MM | WOODEN
PLANKS TILES



G6 60601



SUITABLE FOR
WALL & FLOOR




BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING

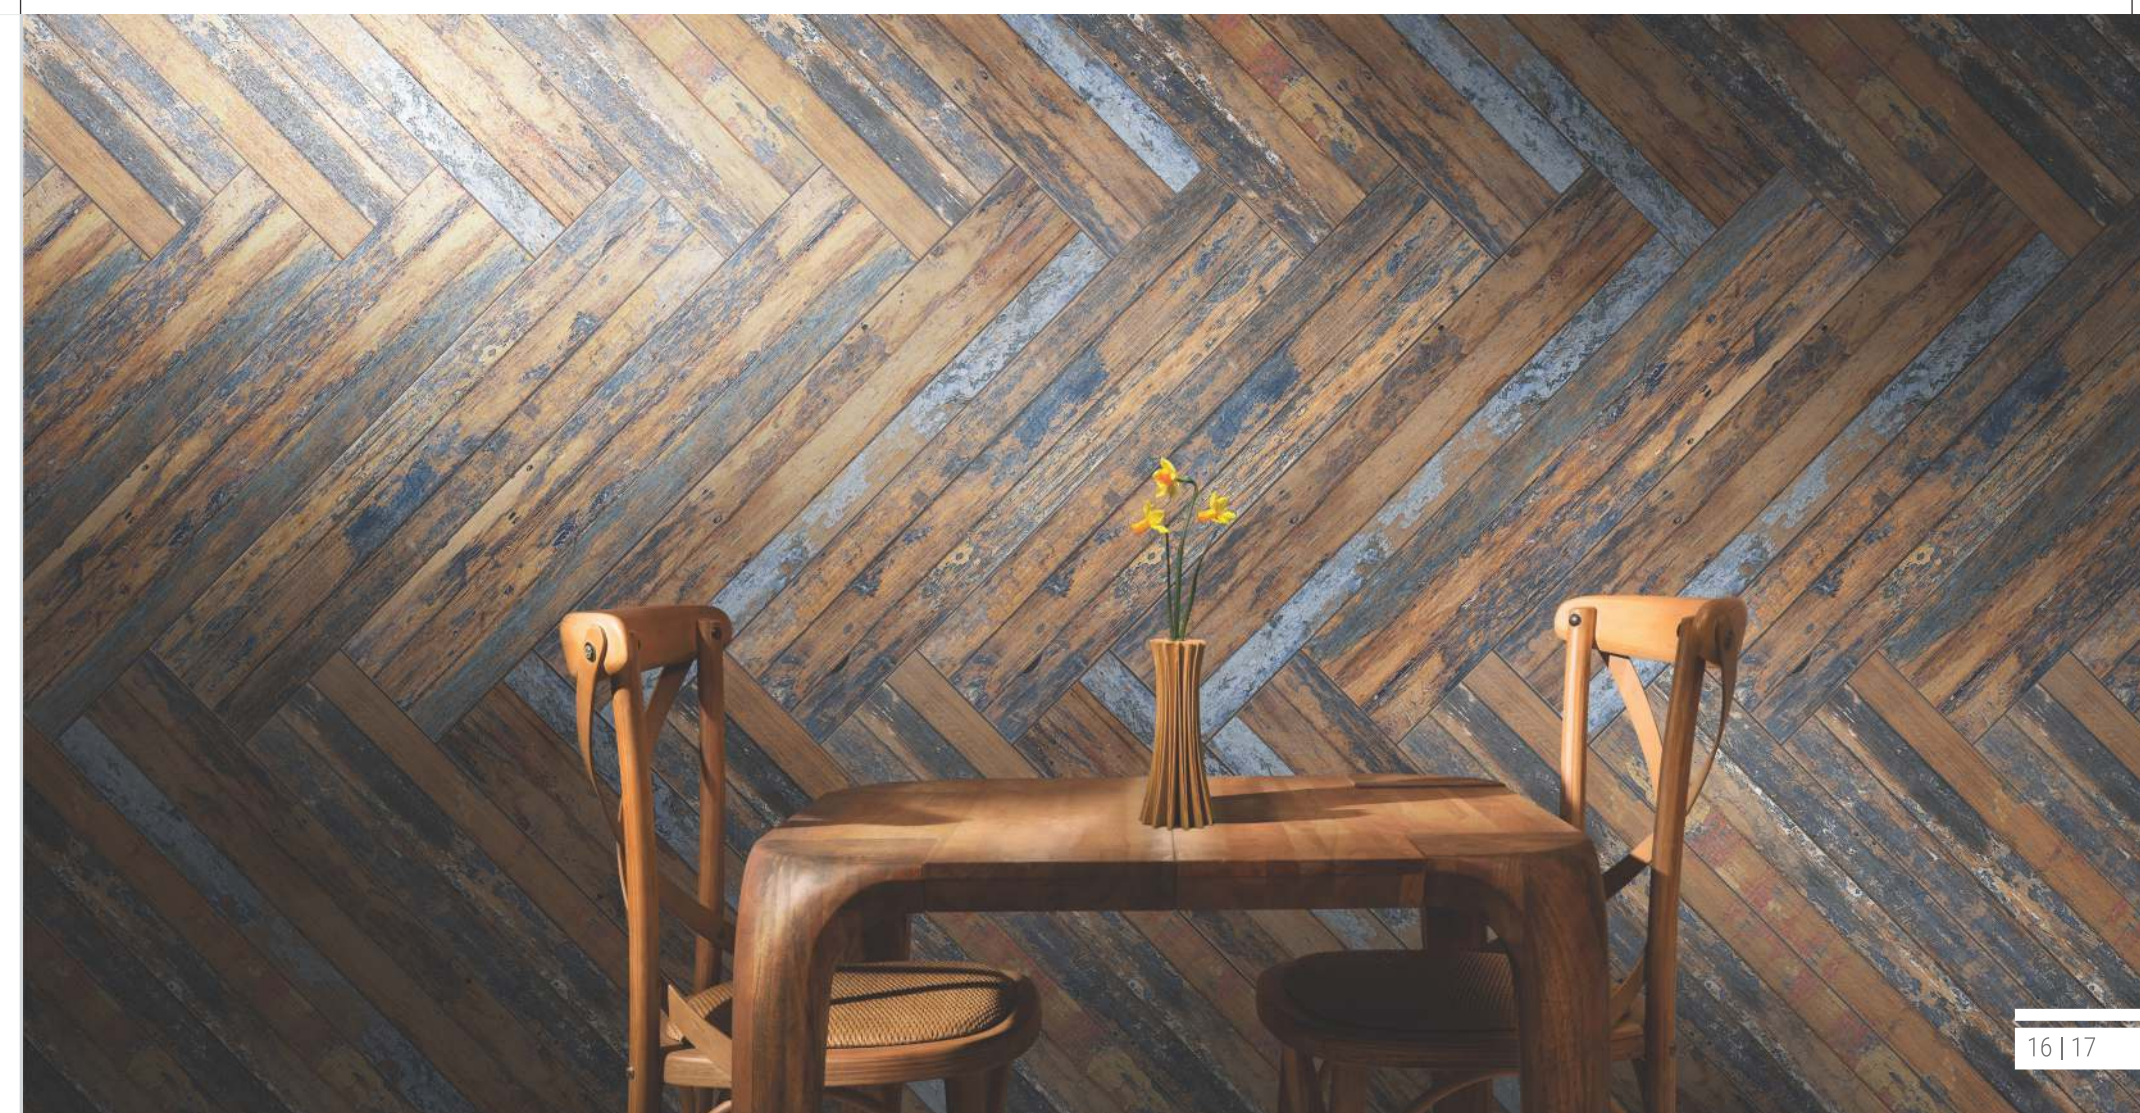



200x
1000MM | **WOODEN**
PLANKS TILES



G6 60602



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING





200x
1000MM | WOODEN
PLANKS TILES



M5 60245



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES




RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING





200x
1000MM | **WOODEN**
PLANKS TILES



M5 60246



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING






200x
1000MM | WOODEN
PLANKS TILES




M5 60247






200x
1000MM | WOODEN
PLANKS TILES

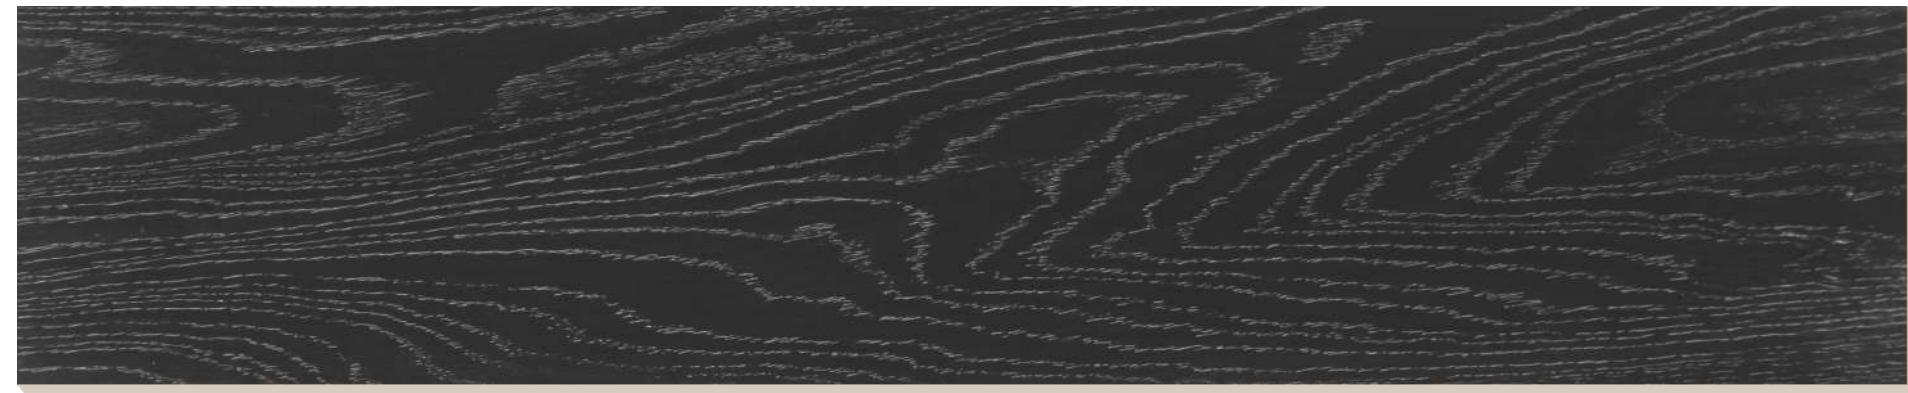

N9 615501





200x
1000MM | **WOODEN**
PLANKS TILES



N9 615502



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING





200x
1000MM | **WOODEN**
PLANKS TILES



P5 21081



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING





200x
1000MM | WOODEN
PLANKS TILES



P5 21084



SUITABLE FOR
WALL & FLOOR




BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING

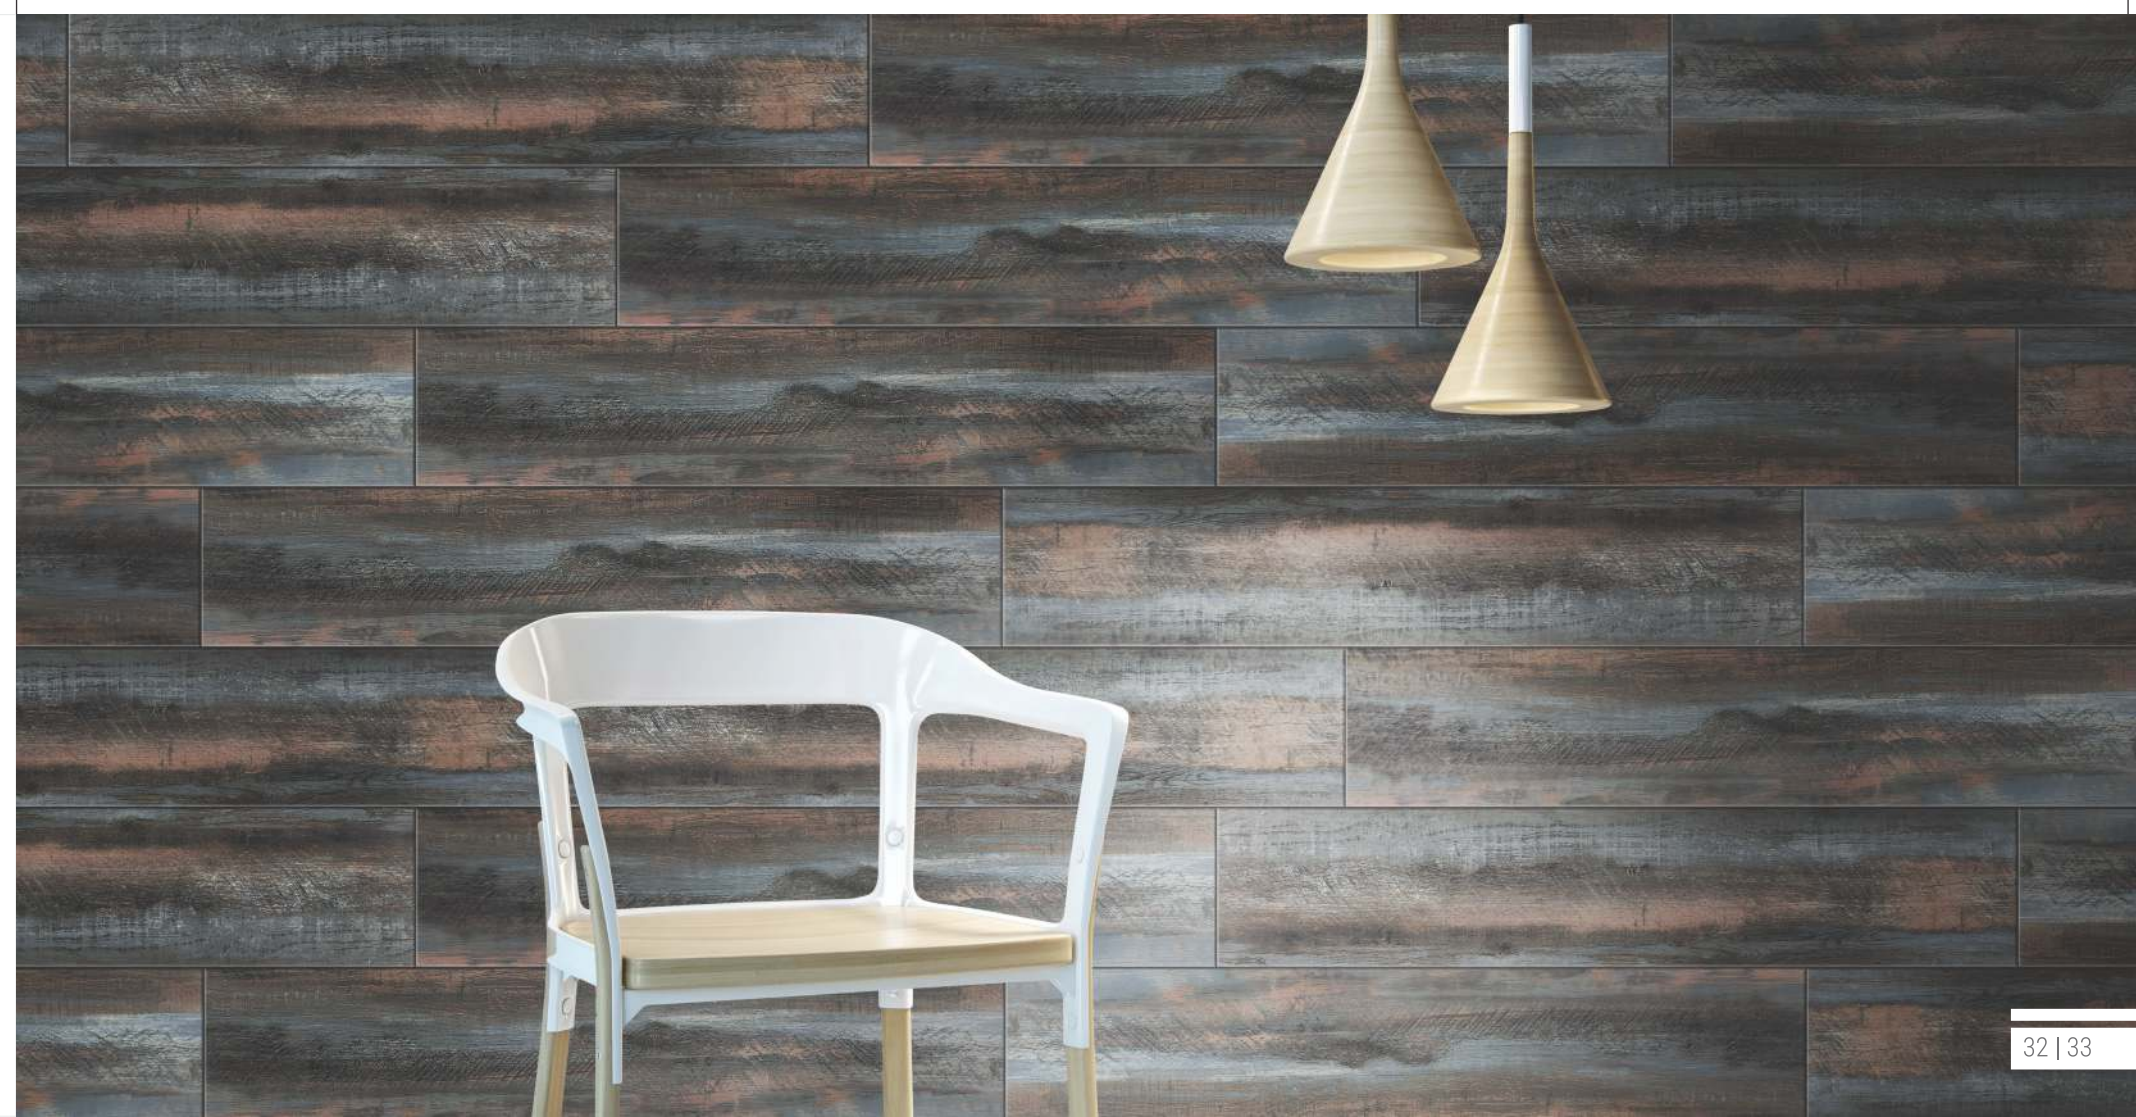



200x
1000MM | **WOODEN**
PLANKS TILES



S6 17112



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING







200x
1000MM | WOODEN
PLANKS TILES



S6 17115





200x
1000MM | WOODEN
PLANKS TILES



S6 17116



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING





200x
1000MM | WOODEN
PLANKS TILES



S6 17117



SUITABLE FOR
WALL & FLOOR




BRIGHT FINISHING
TILES




RANDOM
PATTERN




USE GROUTING FOR
BETTER LAYING

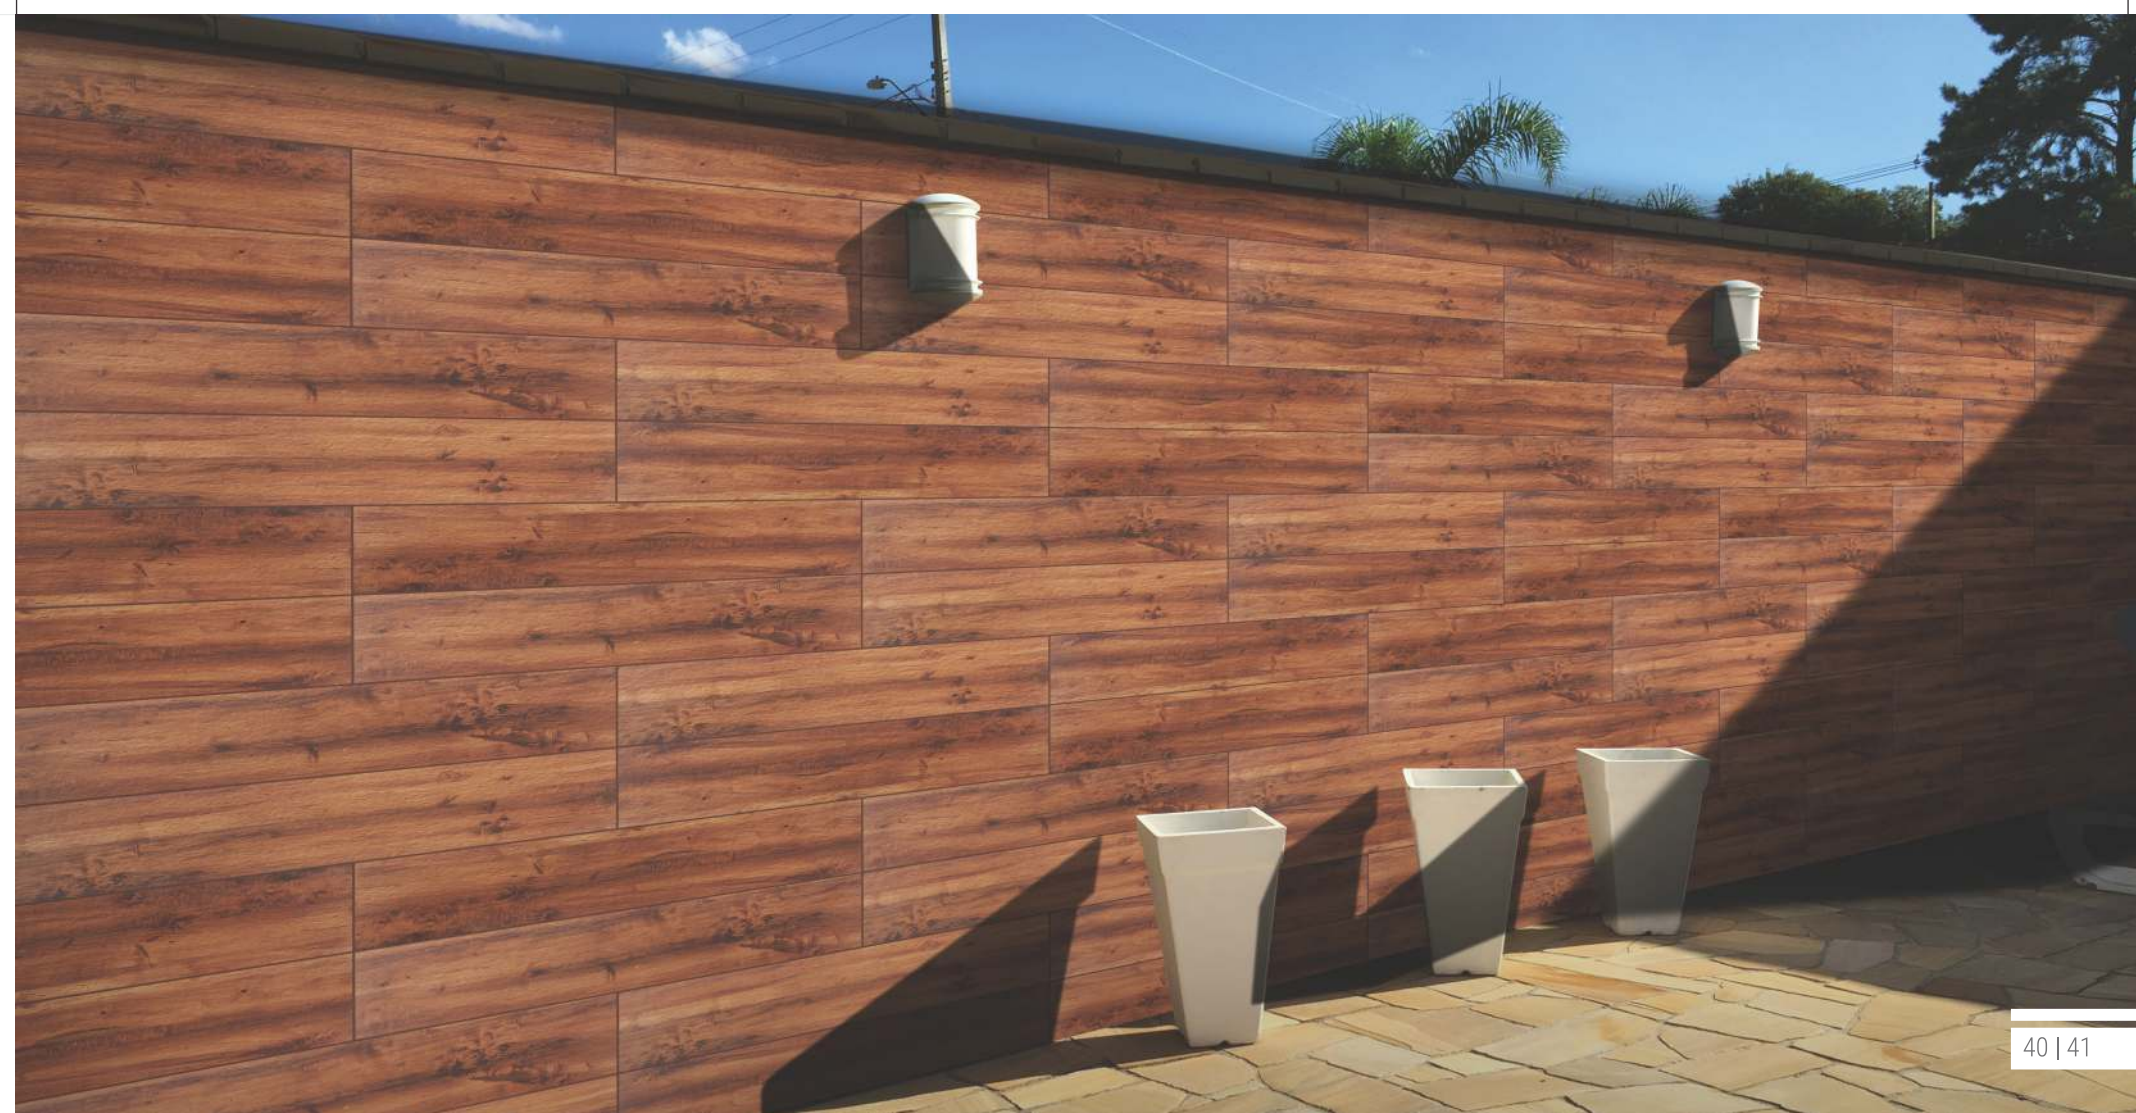



200x
1000MM | WOODEN
PLANKS TILES

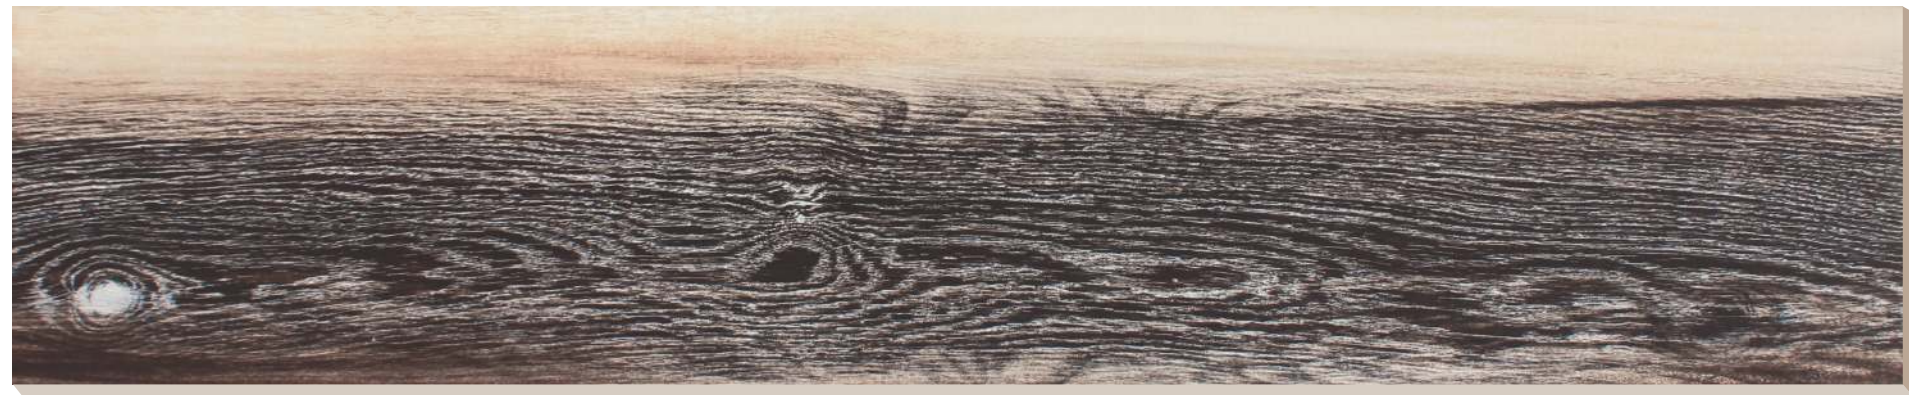

S6 17118



SUITABLE FOR
WALL & FLOOR




BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING

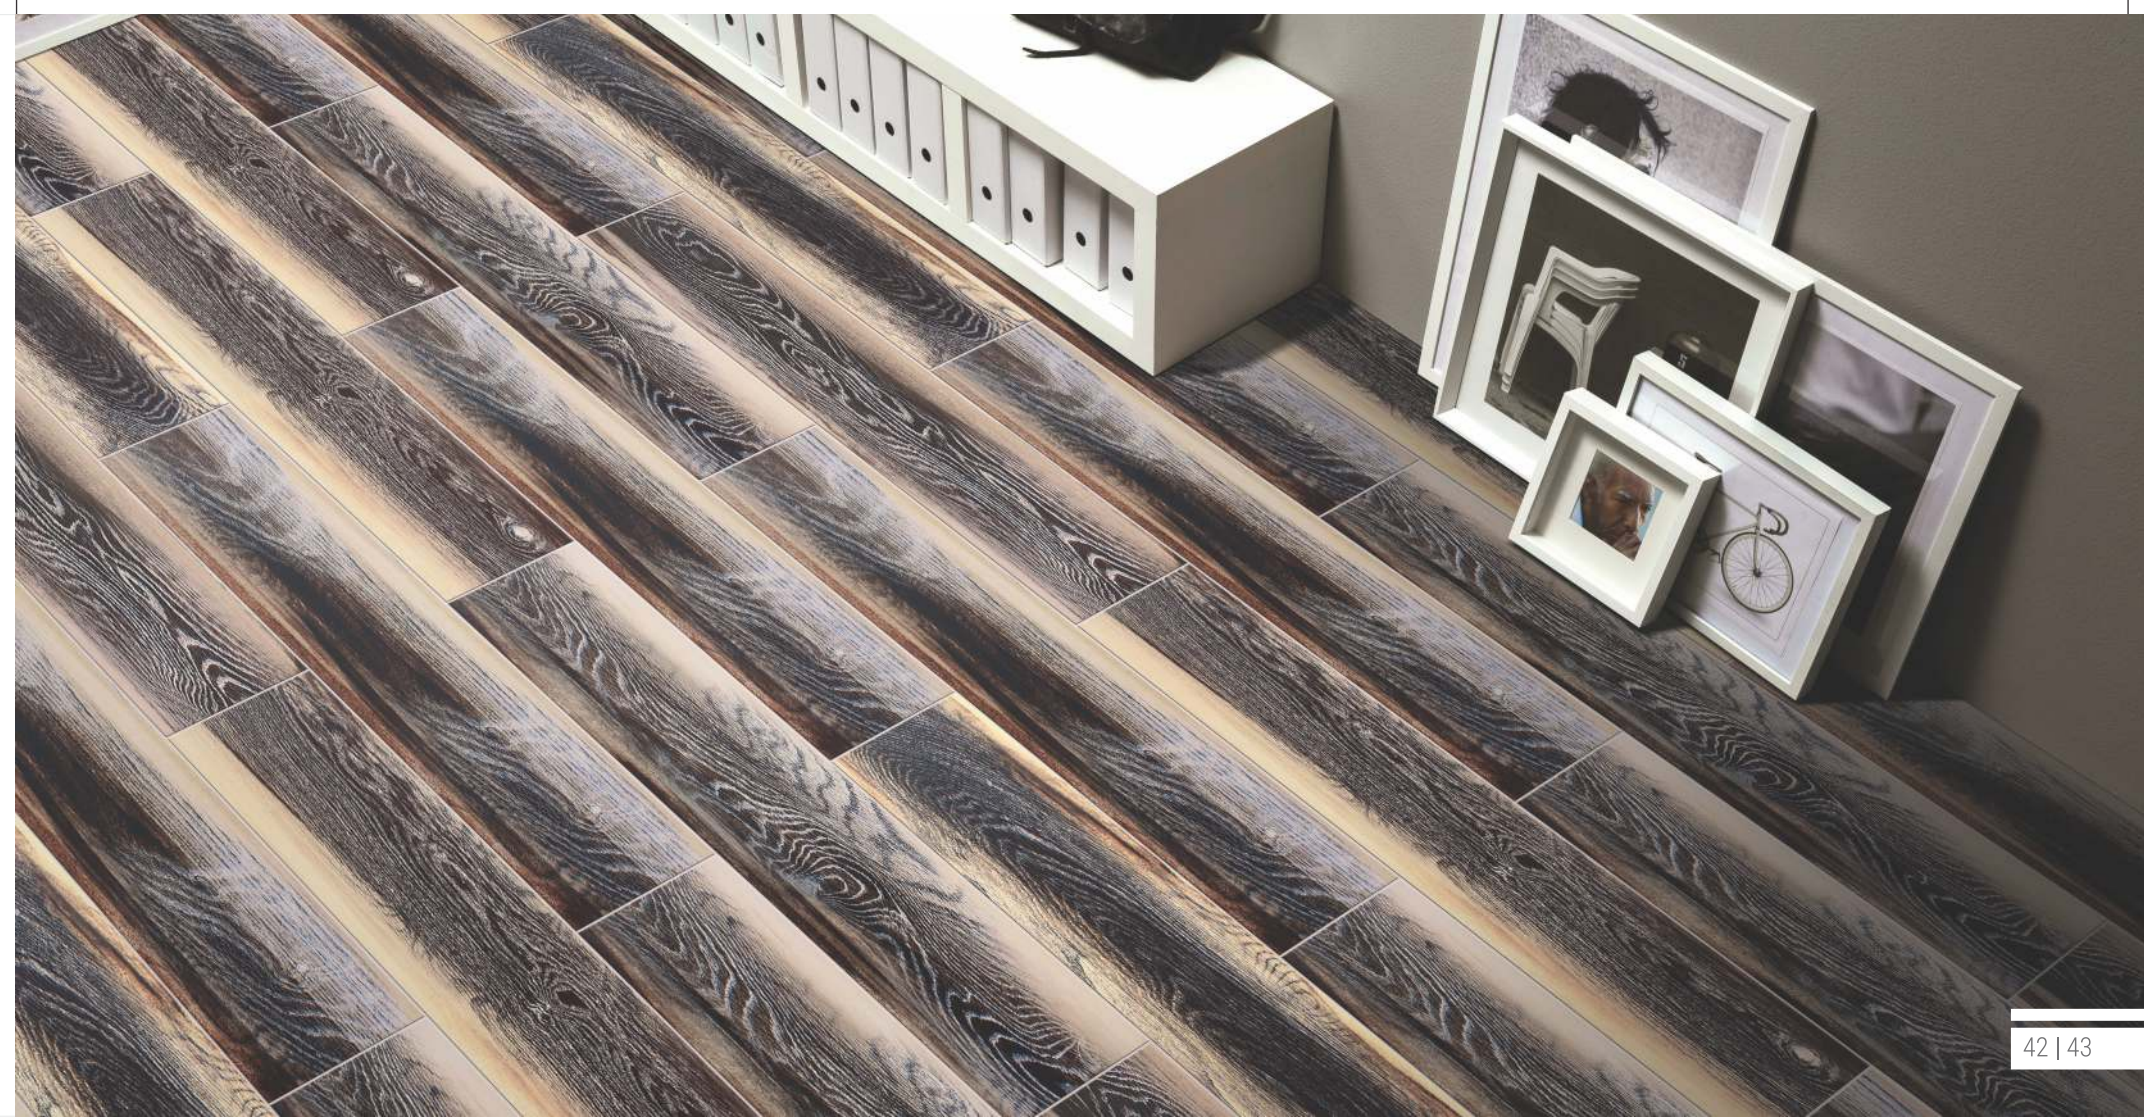



200x
1000MM | WOODEN
PLANKS TILES



S7 20155



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES




RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING





200x
1000MM | **WOODEN**
PLANKS TILES



S7 20156



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING





200x
1000MM | WOODEN
PLANKS TILES



S7 20157



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES




RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING






200x
1000MM | WOODEN
PLANKS TILES



S7 20158





200x
1000MM | **WOODEN**
PLANKS TILES



S7 20159



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING





200x
1000MM | **WOODEN**
PLANKS TILES



T8 8001



SUITABLE FOR
WALL & FLOOR

BRIGHT FINISHING
TILES

RANDOM
PATTERN

USE GROUTING FOR
BETTER LAYING





200x
1000MM | WOODEN
PLANKS TILES



T8 8002



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES




RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING





200x
1000MM | **WOODEN**
PLANKS TILES



DEACKWOOD 1000



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING





200x
1000MM | **WOODEN**
PLANKS TILES



DEACKWOOD 2000



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING





200x
1000MM | WOODEN
PLANKS TILES



DEACKWOOD 3000



SUITABLE FOR
WALL & FLOOR




BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING


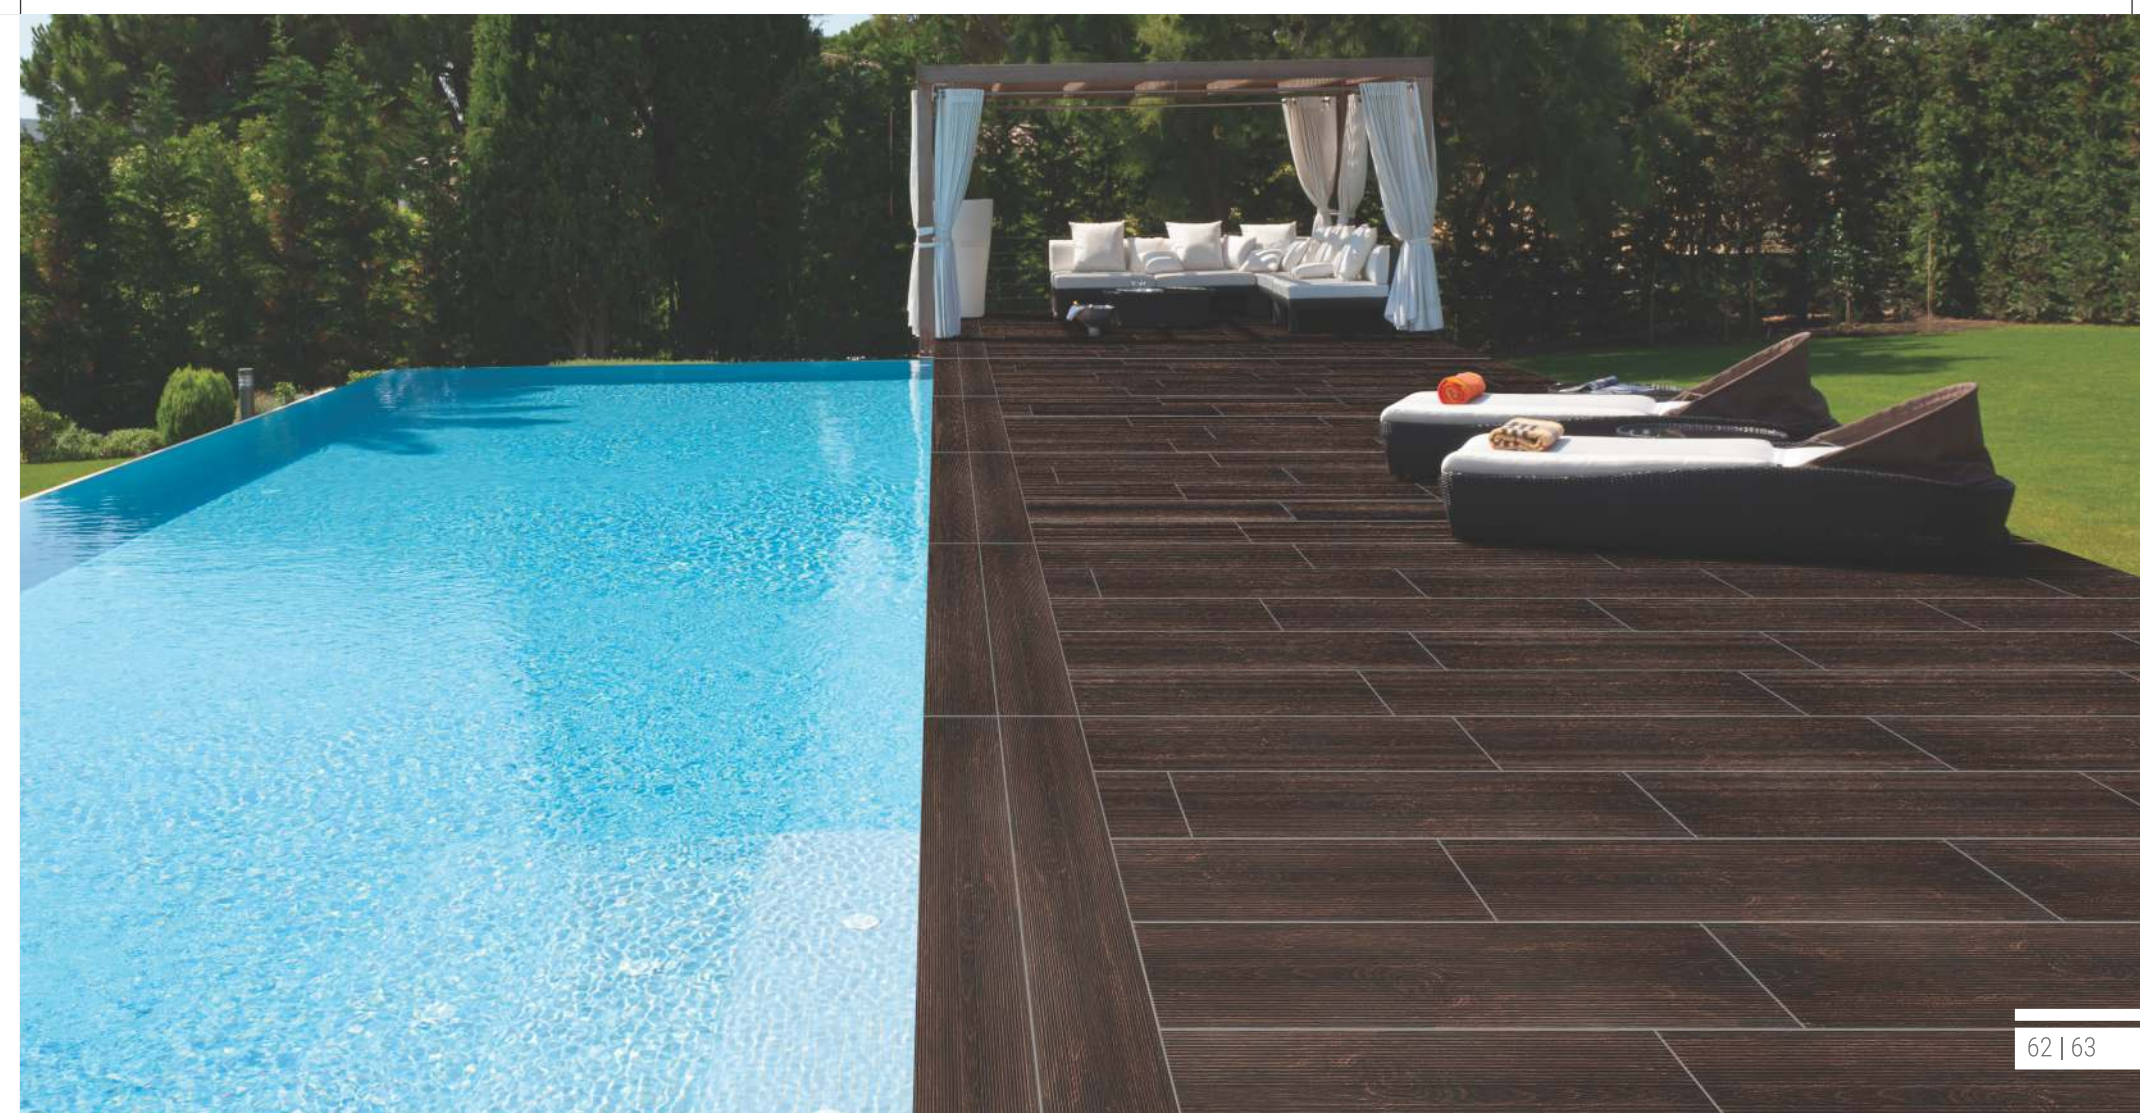




200x
1000MM | WOODEN
PLANKS TILES



DEACKWOOD 4000

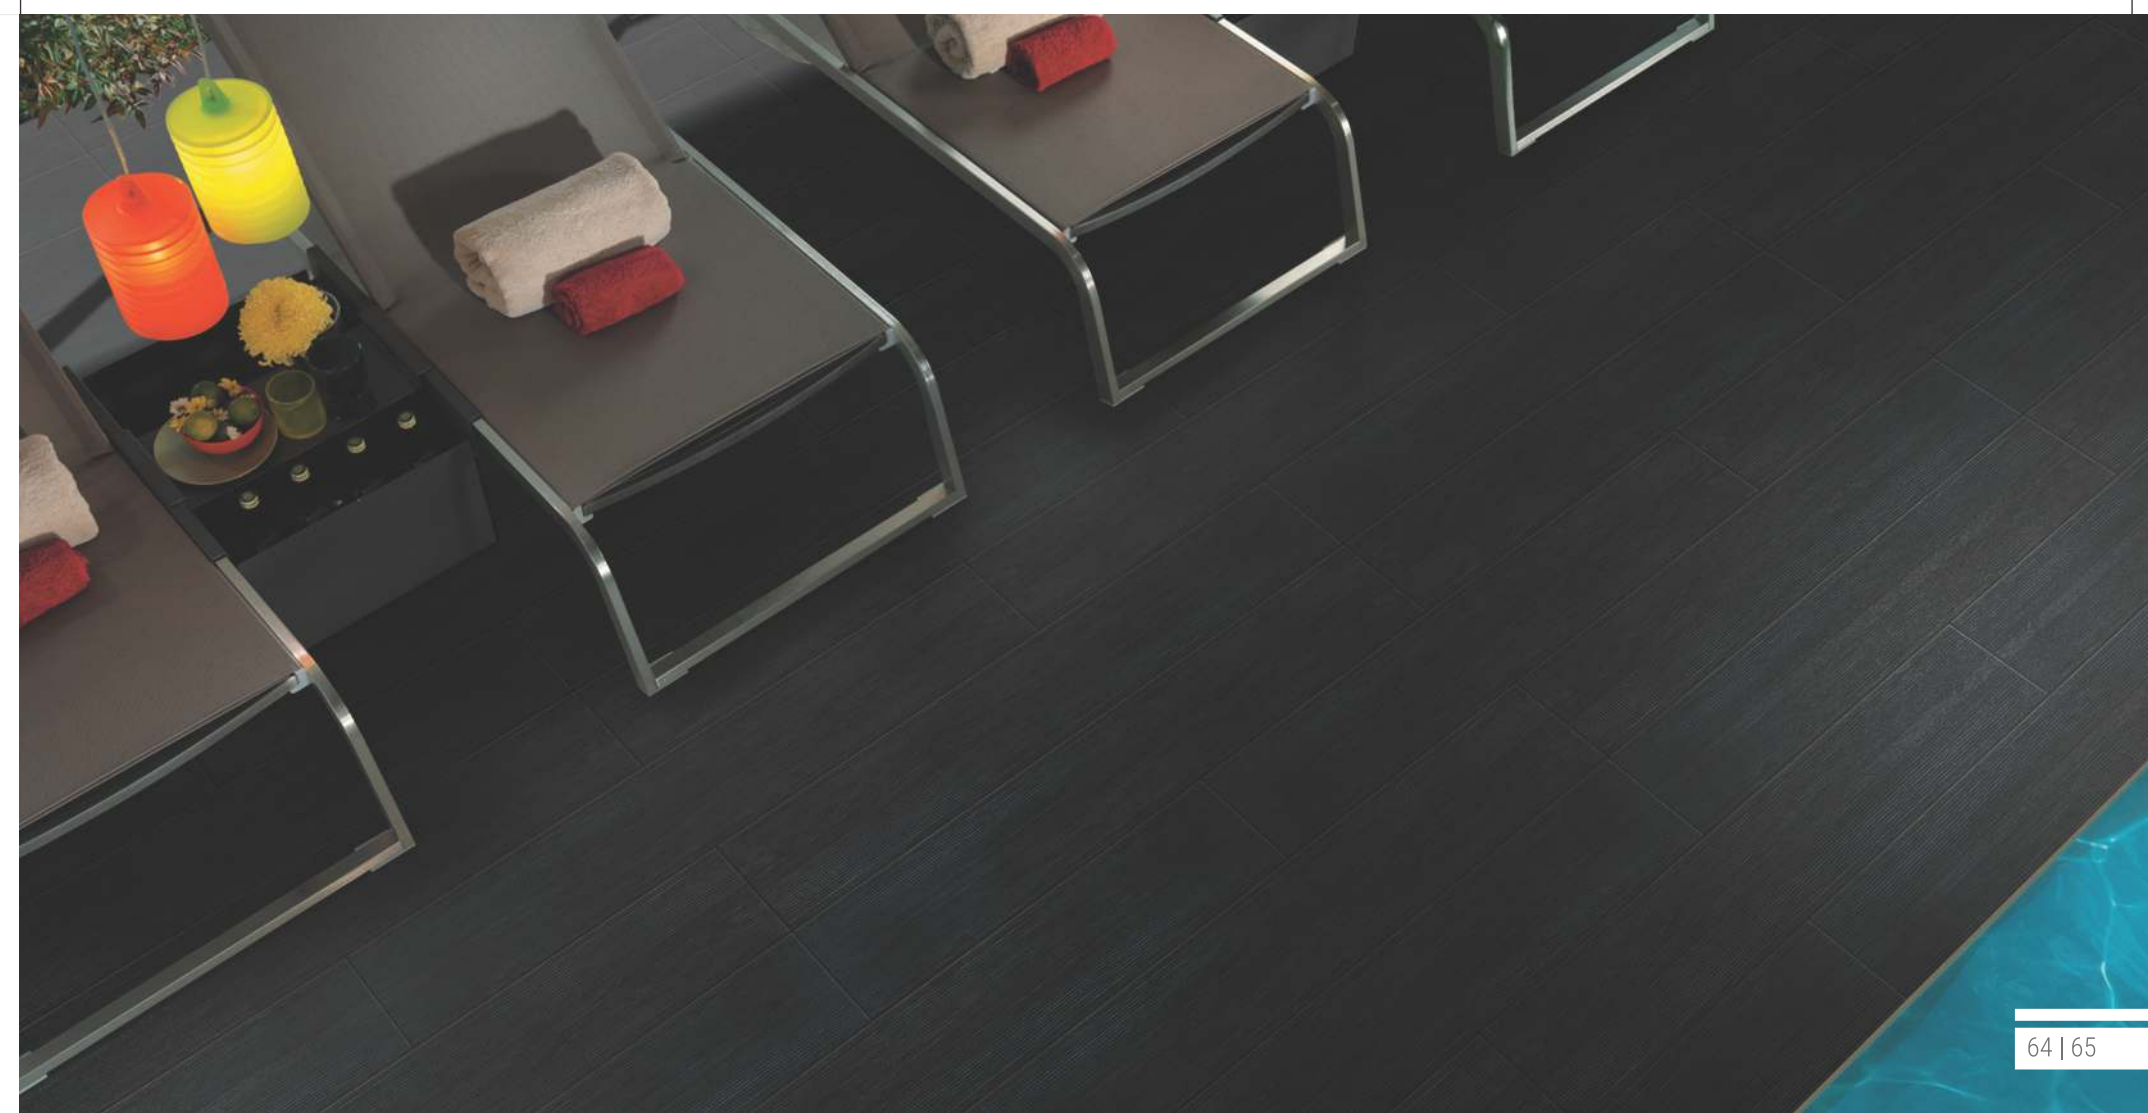



200x
1000MM | **WOODEN**
PLANKS TILES



DEACKWOOD 5000



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING







200x
1000MM | WOODEN
PLANKS TILES



MARGLLOS

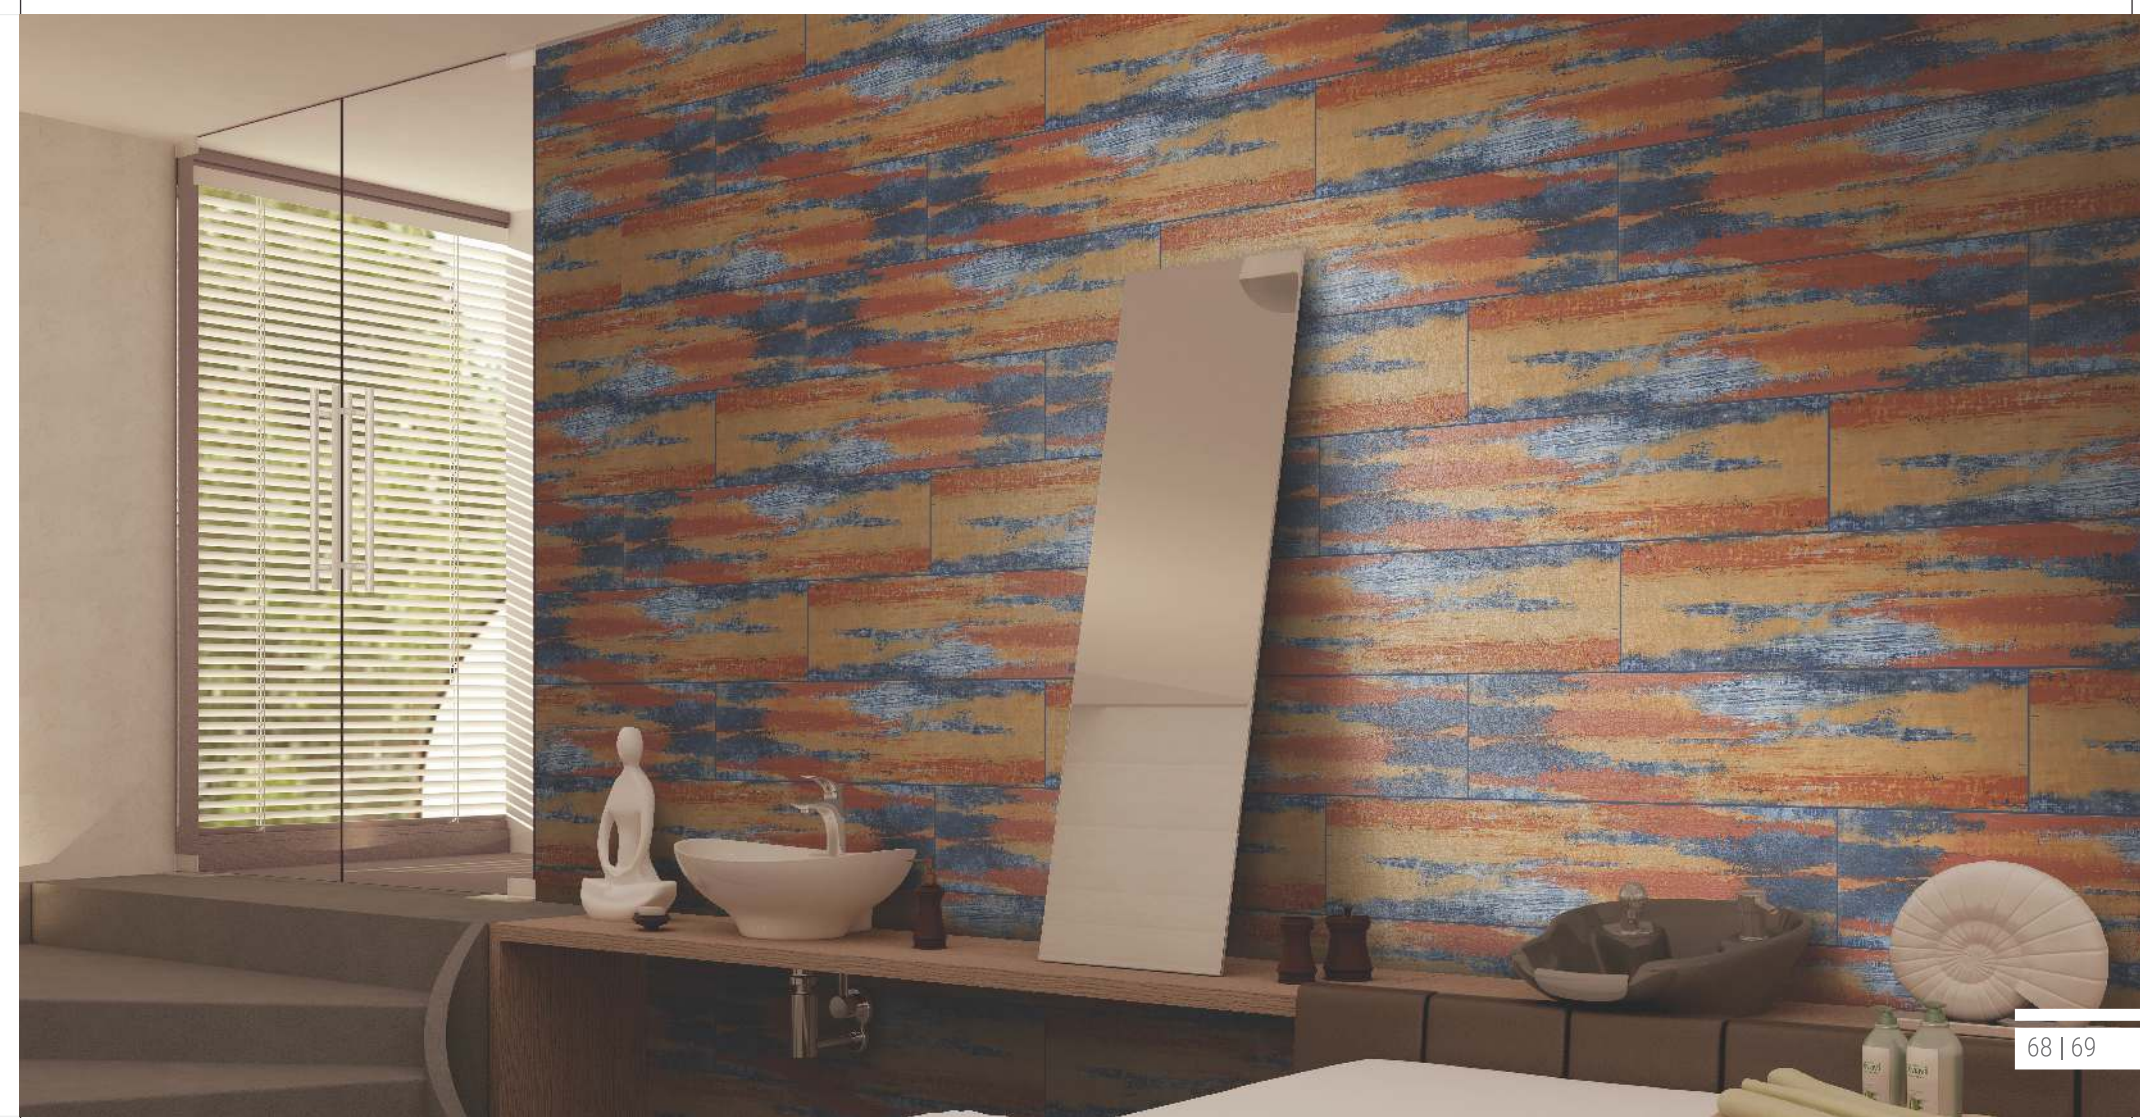



200x
1000MM | **WOODEN**
PLANKS TILES



MARGLLOS GREY



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING






200x
1000MM | **WOODEN**
PLANKS TILES



MARGLLOS WHITE




TECHNICAL SPECIFICATION

Sr. No.	Pictogram	Property	International Std. ISO 13006/EN 176 Group	Tiles Value	Method of Testing
1		Deviation in length	+/-0.6%	+/-0.3%	ISO 10545 Pt 2
2		Deviation in thickness	+/-5%	+/-3%	ISO 10545 Pt 2
3		Straightness of sides	+/-0.5%	+/-0.1%	ISO 10545 Pt 2
4		Rectangularity	+/-0.6%	+/-0.2%	ISO 10545 Pt 2
5		**Surface flatness	+/-0.5%	+/-0.2%	ISO 10545 Pt 2
6		Water absorption	< 2- 4 %	< 2- 4 %	ISO 10545 Pt 3
7		*Mohs hardness	>6	>6	EN 101
8		Flexural strength	>35N/mm²	³46N/mm²	ISO 10545 Pt 4
9		Abrasion resistance	<175 mm²	<144 mm³	ISO 10545 Pt 6
10		**Skid resistance (Friction co efficient)	>0.4	>0.4	ISO 10545 Pt 17
11		Breaking strength	1113 N	2800 N	ISO 10545 Pt 4
12		Frost resistance	Frost proof	Frost proof	ISO 10545 Pt 12
13		Chemical resistance	No Damage	No Damage	ISO 10545 Pt 13
14		Thermal shock resistance	No Damage	No Damage	ISO 10545 Pt 9
15		Colour resistance	No Damage	No Damage	DIN 51094
16		Stain resistance	Resistance	Resistance	ISO 10545-14
17		Moisture expansion	Nil	Nil	ISO 10545-10
18		**Glossiness	-	Min.80% reflection	Glossmeter
19		Resistance to Surface Abrasion (of tiles intended for use on Floors)***	Abrasion class shall be specified by the manufacturer	PEI Group V	ISO-10545-7 IS:13630-11

PACKING DETAILS

Sr. No.	Size	No. of Tiles Per Box	Coverage Area in Sq. Feet	Approx. Weight / Box
1	200x1000mm	5 Pcs.	10.76 Sq. Ft	22.3 Kg.

APPLICATIONS

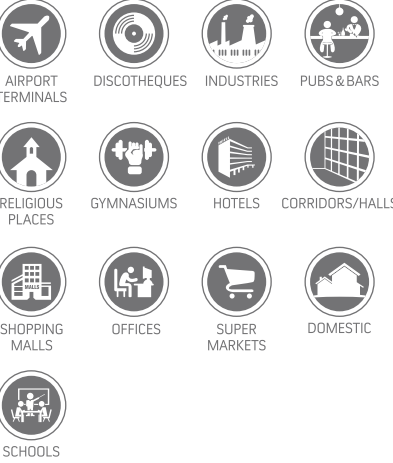

DISCLAIMER: Wooden Tiles reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime, the colors shown of tiles in this catalogue are purely illustrative and limited to printing process, please refer actual sample before final selection, the details of sizes, colors, references should be verified for typographical errors.

LAYING INSTRUCTIONS

TILES FIXING INSTRUCTIONS

- 1. All the tiles must be checked prior to fixing for quality, batch no. and choice.
- 2. Plaster the surface of the floor to be tiled and allow curing atleast two weeks before tiling.
- 3. While fixing pick tiles from various boxes alternatively, lay them in the desired patterns and make sure that they give an acceptable blend of colour and design. Please note that shade variation is inherent in manufacturing tiles.
- 4. For fixing tiles we recommend to use the fixing adhesives or equivalent product for the best result.
- 5. For fixing tiles in floor using conventional method, we suggest the following laying instruction:
A: use cement and sand mortar in the ratio 1:4. Add water to create a consistent paste.
B: Apply 20-25MM of bedding materials over the floor area of 1.0SQM at a time.
C: Apply a thin coat of the slurry on the back of the tile to ensure proper and full bedding. Press gently for even adherence of the tiles with surface.
Do not use any heavy materials like iron or hammer to press tile.
- 6. For fixing the tools on Dado, we recommend the use of adhesive or equivalent materials.
- 7. Allow 3-4 days of bed curing after laying tiles and later fill the joints with grout.
- 8: We recommend maintaining a joint gap of 1-2mm between the tiles to allow possible thermal expansion at later stage.
- 9: Please note that company will not accept any liability in case of any problems arising out of adherence of above fixing instructions.

DISCLAIMER : Metro reserves the right to delete and amend either totally or partially, any of the colours, shapes, sizes, references and other technical specifications contained in the catalogue at any time. The colours shown in this catalogue are purely illustrative and limited to printing process. Please refer actual samples before final selection. The details of colours, sizes and references should be verified for photography errors. SHADE & SIZE VARIATIONS are inherent characteristics of ceramics. NO COMPLAINTS SHALL BE ENTERTAINED ON TILES ALREADY/FIXED.

NOTES :

- * All technical specifications in this catalogue are for premium grade materials only.
- * SHADE/SIZE VARIATION are inherent characteristics to ceramics. Certain products purposely have variations that are the parts of designs and process. The same have been indicated.
- * It is recommended to blend tiles by mixing tiles from various boxes and check for natural hue before fixing.
- * Company's liability is also limited to the material supplied by the company; no other claim is entertained under any circumstances.
- * No complaints shall be entertained regarding the decoration on tiles.

Helpful tips for better aesthetics look (Laying Instructions)

- 1. For better aesthetic value and for long term, guarantee use it is strongly recommended to provide 3 mm spacer in between the tiles. Without spacer, harmony of tiles might be disturbed.
- 2. Make sure that the design, pattern and the arrow marked on the back side of tiles must be in the same direction.
- 3. Any product from digitile must be installed (laid) in the same format. i.e. 200x1000mm size. For the particular series customized size application is not possible.
- * THE COMPANY SHALL NOT BEAR ANY LIABILITY FOR THE PROBLEMS OUT OF NON-FULFILLMENT OF LAYING THE INSTRUCTIONS AS ABOVE.





Corporate Office

Office No 4,
Shree Hari Chamber,
8-A National Highway,
Lalpar, Morbi-363642,
(Gujarat) INDIA.

www.enrichceramic.com
export@enrichceramic.com